




CONNOR-WINFIELD CORPORATION

AURORA, IL. 60505
 PHONE (630) 851-4722
 FAX (630) 851-5040

14 PIN DIP ACMOS VCO

SPECIFICATIONS		AV53R4	
Center Frequency (Fo)		155.52MHz	
Frequency Stability		±1.5%	
Temperature Range		0°C to +70°C	
Supply Voltage		+5Vdc ±5%	
Supply Current		50mA Maximum, 30mA Typical	
Output	Waveform	CMOS Squarewave	
	Load	12pF	
	Voltage V_{oh}	4.5V Minimum	
	V_{ol}	0.5V Maximum	
	Current I_{oh}	-24mA	
	I_{ol}	24mA	
	Duty Cycle	50/50 ±20% Max, ±10% Typ measured at 50% level	
	Rise/Fall Time	3nS Maximum	
SSB Phase Noise (Typical)	@1KHz	-80dBc/Hz	
	@10KHz	-100dBc/Hz	
	@25KHz	-105dBc/Hz	
	@100KHz	-115dBc/Hz	
Frequency Control			
Control Voltage	0.3 to 5.0Vdc Positive Transfer Characteristics		
Center Frequency	2V to 3V		
Input Impedance	>50K Ohms at 10KHz		
Modulation Bandwidth	<15KHz		
Deviation @ 25°C (Referenced to Fo)			
		Minimum	Maximum
0.3V Pin 1		-10%	-15%
5V Pin 1		+10%	+15%

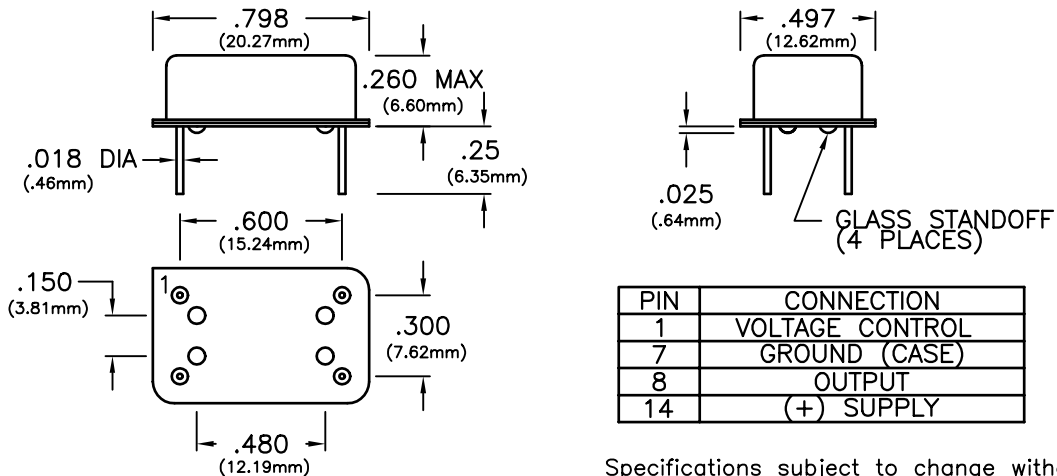

Specifications subject to change without notice

BULLETIN #: VC028
 PAGE 1 OF 1

REV: 00
 DATE: 11/6/98

ISSUED BY: _____

Dimensional Tolerance: ±.02"
 ±.005"